



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
V	OPEN	Open drawings to customers





A view(2/1)

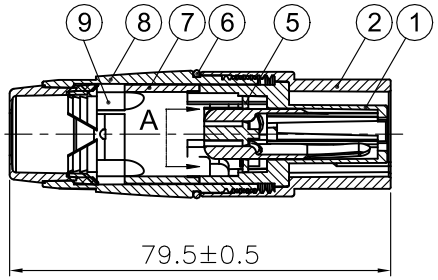




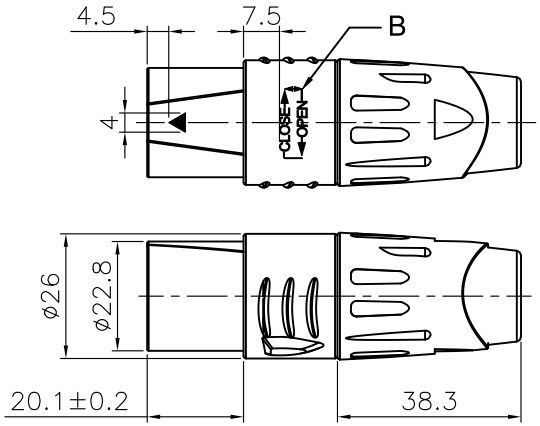






B view enlarged

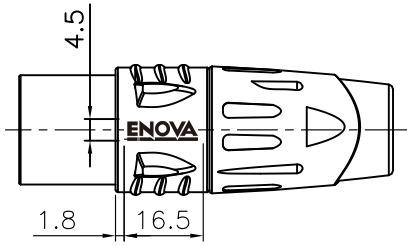



Notes:

1. ENOVA trademark is carved by laser.
2. Default black clamping claw:
   suitable for 8.5 ~ 11.5mm wire diameter.
3. Additional white clamp claw:
   suitable for 11.5 ~ 13mm wire diameter.
4. Remove O-ring used for cable O.D.: 8.5~9.3mm ,
   Standard connector used for cable O.D.: 9.5~11.5mm(below).

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
8	CABLE CLAMP	POM	WHITE	1	
	CABLE CLAMP	POM	BLACK	1	
7	CAP+BOOT	PA+TPR	BK+BK	1	
6	O-RING	SILICON	BLACK	1	
5	BACK COVER	PA	BLACK	1	
4	("1-, 2-" PIN)	PHOSPHOR BRONZE	SILVER	2	
3	("1+, 2+" PIN)	PHOSPHOR BRONZE	SILVER	2	
2	DIE-CAST SHELL	ZZnAl4-1	Electro coating black)	1	
1	PLASTIC BODY	PA	BLACK	1	

DIMENSIONS ARE IN MILLIMETERS		APPROVED	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES ANGLES = ±5° UP TO 6 = ±0.2 6–40 = ±0.4 40–120 = ±0.6 120–315 = ±1 ABOVE 315 = ±1.6		CHECKED	DATE
		DRAWN MABIAO	DATE 2026-10-13
		FILE NO.	
THIRD_ANGLE		ERP LINK: -----	
SCALE	1/1.5		

Enova Solutions AG

TITLE: SOLDER TYPE MALE SPEAKER CONNECTOR

PART NO. SP24MB | REV. A1