



XLR adaptation to the cable diameter

The standard for the cable diameter is 5mm - 6.5mm


As standard, there is an O-ring over the cable boot. This O-ring also ensures the correct distance.



For the cable diameter 6.5mm - 7.0mm, the lower part of the standard Strain relief must be removed. The O-ring over the cable boot remains.



For the cable diameter 3.3mm - 4.8mm, the black O-ring must be removed.

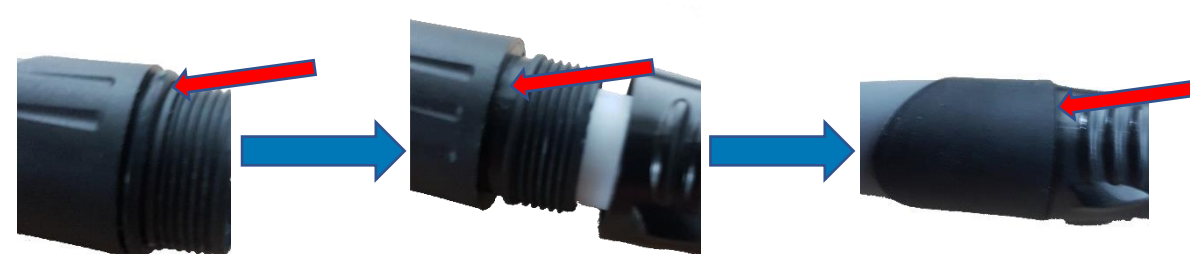

For the cable diameter 7.0mm - 8.0mm, another Strain relief must be used.